




**Ideal
Products**

Product Information

Stainless Steel Roll Jacketing with Polysurlyn Moisture Retarder

Product Description

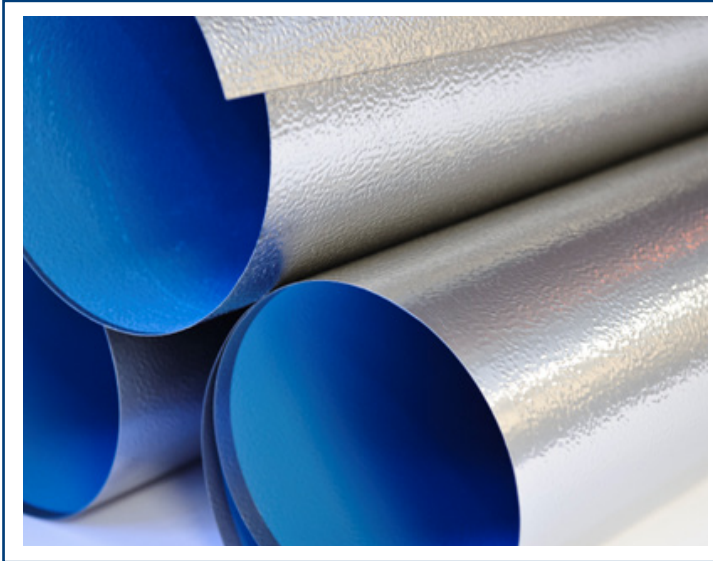

Ideal Products' Stainless Steel Jacketing with Polysurlyn Moisture Retarder is produced from T-304 and T-316 stainless steel, meeting ASTM A-240 standards. The interior of this product is lined with a 3 mil thick co-extruded Surlyn and Polyethylene moisture retarder. This film is laminated to the stainless steel by a process of heat and pressure. The exterior of the Polysurlyn Stainless Steel is a 2B mill finish.

Polysurlyn Moisture Retarder provides an excellent resistance to moisture and has excellent abrasion resistance during installation.

Polysurlyn Moisture Retarder Stainless Steel Roll Jacketing is available in smooth, stucco embossed or 3/16" corrugation (cross crimped) finishes, and in 0.010" (.025mm), 0.016" (0.4mm), 0.020" (0.5mm) thicknesses. For other thicknesses or finishes please inquire within. Stainless Steel Jacketing in itself, has extensive corrosion resistive properties and a high resistance to heat. Ideal Products' Stainless Steel Roll Jacketing with Polysurlyn Moisture Retarder has a soft-annealed temper, making it easy to handle and fabricate.

Melting Temperatures

T-304 Stainless Steel 2550° F - 2650° F
 1399° C - 1454° C

T-316 Stainless Steel 2500° F - 2550° F
 1371° C - 1399° C

Product Application

Stainless Steel Roll Jacketing with Polysurlyn is used in areas where extra protection from corrosion and abuse is a factor. It is used in refineries, plants and mills to protect pipes, vessels and tanks where chemical attack is a problem. It can also be used in areas where high temperatures are or could be an issue.