


Powerbase® Weld Pins



A specialty type of Capacitor Discharge (CD) pin, the Powerbase® pin can be welded through mill scale, rusted or painted surfaces, without having to grind/clean the base metal. After the pin is welded to the surface, a self-locking washer is installed to secure the insulation.

Specifications:

Diameter "D"	Flange Diameter "FD"	Stnd Lengths "L"
12 ga (.106)	.165	1" - 8" (increments of 1/2") & 9"
10 ga (.135)	.188	1" - 8" (increments of 1/2"), 9" & 10"

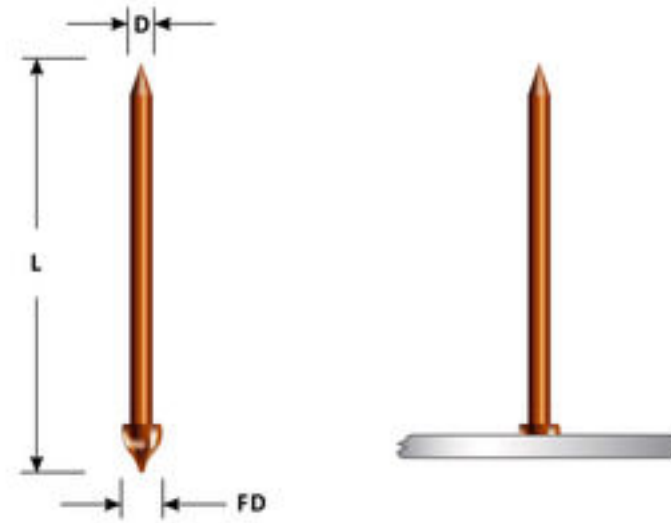

Material:

- Available in Mild Steel with copper coating
- Stainless Steel Type 302HQ
- Special order Type 310 and Type 316L Stainless Steel

We do not recommend the use of Powerbase® pins on metals less than 1/16" thick.